


Company Name
Contact Person
Phone Number
Email address
Project Name/Number
Project address
Notes

Inula lightstack head SX 985 23-9



luminaire head

symmetric,
LED, 3000 lm, 3000 K, CRI > 80, electronic converter, Total power:
42 W

luminaire head, base tube to be ordered separately, luminaire
housing made of die-cast aluminium, powder-coated, without
shielding

Optical system: free-form lens optics single, for precise light control
incl. 6m feed cable,

CE, IP65, Protection Class II, optional I

colour: Selux Graphite or special finish

Height H: 204 mm

Diameter Ø: 200 mm

Weight: 10 kg

Make: Selux, Type: SX 985 23-9



Modifications are possible due to the constant development and improvement of LED technology.


© Selux AG, Subject to technical modification 9.2020

Selux AG, Motzener Straße 34, D-12277 Berlin, T +49 30 72001-0, F -100, info@selux.com, www.selux.com

Inula lightstack head

SX 985 23-9

Technics

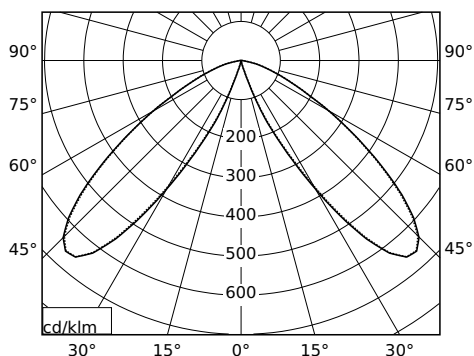

Photometric data: 8602
 Upward light ratio (ULR): 0.1 %

Lamp

LED · 3000lm · Light colour: 3000 K · CRI > 80

Optic

symm..

Electrics

electronic converter · Total power: 42W ·
 6m feed cable
 control options:
 dynamic · DALI · CLT · HNS · AmpDim ·
 individual power reduction in 300 lumen
 steps ex work

Luminous flux characteristics / Operating time of LED

	20000	40000	60000	80000
Operating time LED				
Lumen maintenance	93%	90%	87%	84%
LLMF*	0.93	0.9	0.87	0.84

* = Lamp lumen maintenance factor

Modifications are possible due to the constant development and improvement of LED technology.

© Selux AG, Subject to technical modification 9.2020

Selux AG, Motzener Straße 34, D-12277 Berlin, T +49 30 72001-0, F -100, info@selux.com, www.selux.com