

Company Name .....

Contact Person .....

Phone Number .....

Email address .....

Project Name/Number .....

Project address .....

Notes .....



# Inula lightstack head

## SX 985 63-9



### luminaire head

symmetric,  
LED, 6000 lm, 3000 K, CRI > 80, electronic converter, Total power:  
77 W


luminaire head, base tube to be ordered separately, luminaire housing made of die-cast aluminium, powder-coated, without shielding  
Optical system: free-form lens optics double, for precise light control  
incl. 6m feed cable,

CE, IP65, Protection Class II, optional I

colour: Selux Graphite or special finish

Height H: 408 mm  
Diameter Ø: 200 mm  
Weight: 10 kg

Make: Selux, Type: SX 985 63-9

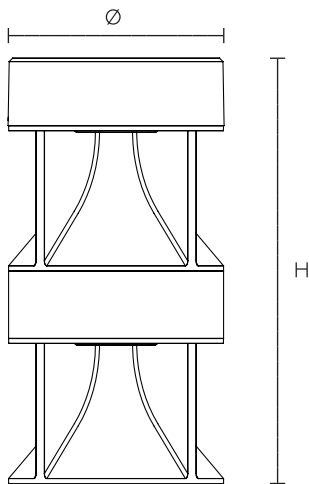

Modifications are possible due to the constant development and improvement of LED technology.


© Selux AG, Subject to technical modification 9.2020

Selux AG, Motzener Straße 34, D-12277 Berlin, T +49 30 72001-0, F -100, info@selux.com, www.selux.com

# Inula lightstack head

## SX 985 63-9

### Technics

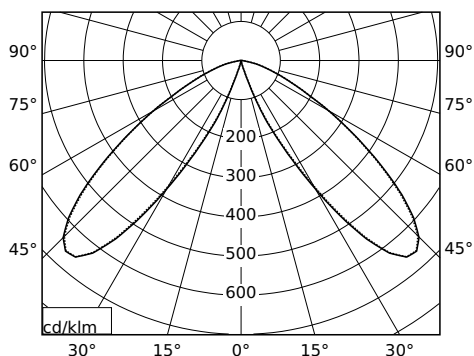

Photometric data: 8602  
 Upward light ratio (ULR): 0.1 %

### Lamp

LED · 6000lm · Light colour: 3000 K · CRI > 80

### Optic

symm..

### Electrics

electronic converter · Total power: 77W ·  
 6m feed cable  
 control options:  
 dynamic · DALI · CLT · HNS · AmpDim ·  
 individual power reduction in 300 lumen  
 steps ex work

### Luminous flux characteristics / Operating time of LED

	20000	40000	60000	80000
Operating time LED				
Lumen maintenance	93%	90%	87%	84%
LLMF*	0.93	0.9	0.87	0.84

\* = Lamp lumen maintenance factor

Modifications are possible due to the constant development and improvement of LED technology.

© Selux AG, Subject to technical modification 9.2020

Selux AG, Motzener Straße 34, D-12277 Berlin, T +49 30 72001-0, F -100, info@selux.com, www.selux.com